

Hydroflex[®] 30/Hydroflex[®] 30S




GENERAL DESCRIPTION

Hydroflex 30/Hydroflex 30S is a specially formulated heavy duty, APP or SBS modified asphalt, protection sheet with synthetic fiber reinforcement.

BASIC USE

Hydroflex 30/Hydroflex 30S is specifically designed to be embedded into Hydrotech’s Monolithic Membrane 6125[®] roofing and waterproofing membranes to provide protection from typical construction traffic. Hydroflex 30/Hydroflex 30S should be covered by the subsequent overburden within 30 days of membrane installation. In high traffic areas where vehicular traffic is anticipated or extreme physical abuse is expected, additional protection may also be required for the membrane assembly.

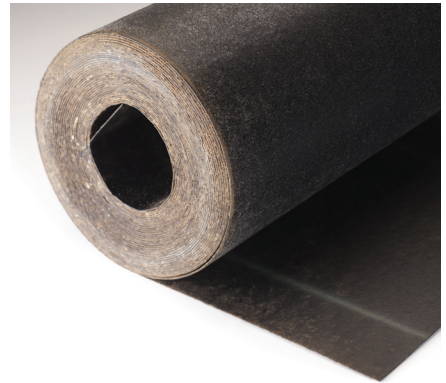

SIZES

Hydroflex 30/Hydroflex 30S is available in roll form, with a width of 39.4 inches (1.0 m) and a length of 66 feet (20 m) (Midwest and Eastern U.S.) and a length of 50.25 feet (15.3 m) (Western U.S.). The rolls equal approximately 216 square feet (18.6 sq.m.) and 165 square feet (15.3 sq.m.) of material respectively.

TECHNICAL DATA

PROPERTY	TEST METHOD	RESULTS
THICKNESS		.085 in.; ± .005 (85 mils, 2mm)
COLOR		Black (with a light broadcast of sand)

LEED INFORMATION

	Credit 4	Credit 5
Recycled Content (% by weight)	12 (pc), 56 (pi)	
Manufacture Location	Kansas City, MO	
Extraction/Harvesting Location	32% Chicago, IL	
VOC Content (g/L)	0	

This information is intended only for general conceptual purposes. It is based on data and knowledge considered to be true and correct. It is offered for the user’s consideration, investigation and verification and is not intended to substitute for the advice provided by appropriate professionals. Hydrotech assumes no liability for the use of this information. The determination of the suitability and applicability of this information is the sole responsibility of the user.